

Stainless Steel Ball Valves

- for use in water, oil and gas
- ¼" - 2" rated to **1000 PSI** WOG (CWP); 2½" - 3" rated to **800 PSI** WOG (CWP); **100 PSI** saturated steam
- 316 stainless steel body, ball and stem
- Teflon® seat, joint gasket and thrust washer
- plastic cover on handle
- blow-out proof stem design
- temperature range **-60°F** to **450°F**

female NPT x female NPT


Size	Port Type	<i>Stainless Steel</i> Part #
1/4"	full	SSBV25
3/8"	full	SSBV38
1/2"	full	SSBV50
3/4"	full	SSBV75
1"	full	SSBV100
1-1/4"	full	SSBV125
1-1/2"	full	SSBV150
2"	full	SSBV200
2-1/2"	full	SSBV250
3"	full	SSBV300



- for use in water, oil and gas
- rated to **1000 PSI** WOG; **100 PSI** saturated steam
- 316 stainless steel body, ball and stem
- Teflon® seat, joint gasket and thrust washer
- plastic cover on handle
- blow-out proof stem design
- temperature range **-60°F** to **450°F**
- lockable

female NPT x female NPT

Size	Port Type	<i>316 Stainless Steel</i> Part #
1/4"	full	SSLBV25
3/8"	full	SSLBV38
1/2"	full	SSLBV50
3/4"	full	SSLBV75
1"	full	SSLBV100
1-1/4"	full	SSLBV125
1-1/2"	full	SSLBV150
2"	full	SSLBV200

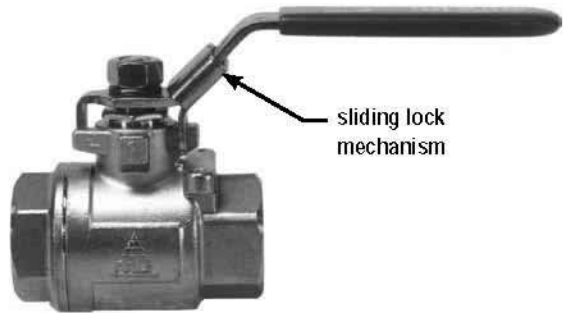

- for use in water, oil and gas
- rated to **800 PSI** WOG; **100 PSI** saturated steam
- 316 stainless steel body, ball and stem
- Teflon® seat, joint gasket and thrust washer
- plastic cover on handle
- blow-out proof stem design
- temperature range **-60°F** to **450°F**
- lockable

female NPT x female NPT

Size	Port Type	<i>316 Stainless Steel</i> Part #
1/4"	reduced	SSLBV25SP
3/8"	reduced	SSLBV38SP
1/2"	reduced	SSLBV50SP
3/4"	reduced	SSLBV75SP
1"	reduced	SSLBV100SP
1-1/4"	reduced	SSLBV125SP
1-1/2"	reduced	SSLBV150SP
2"	reduced	SSLBV200SP

