



GP AUGERS | TRIMAX®

FEATURES

- 35 Series Fas-N-Lok® Teeth
- TriFlow® Pilot Bit with Three Drill Points
- 5/16" Thick Double Flight
- 3 Point Lock Lug and Bolt



ACCESSORIES

- Weld-On Boring Heads (see pg. 15)
- Revolution Series Drives
- R-256 Auger Stand (135102)

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
42", 48" or 60"	Single or Double	5/16"	3 1/2" OD x .300" W


AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	TF-350	37 Series Teeth and 5T30	R-200, R-256, H-200

42" OAL

SINGLE FLIGHT

DOUBLE FLIGHT

ITEM	DIA	NO. TEETH	LBS.	R256	R200	H200	LBS.	R256	H200
6-TM-42	6"	2	46	552940	101324	101318	52	553464	101327
8-TM-42	8"	4	55	553071	102175	101319	59	553465	101328
9-TM-42	9"	4	59	553072	101325	552960	74	553466	101329
10-TM-42	10"	4	66	553073		552962	77	553467	101330
12-TM-42	12"	4	76	553074	101326	552964	88	553468	101331
14-TM-42	14"	6	91	553075		552966	102	553469	101332
16-TM-42	16"	6	97	553076		552968	116	553470	101333
18-TM-42	18"	6	112	553077	102188	552970	129	553471	101334
20-TM-42	20"	6	117	553078		552972	135	553472	101335
24-TM-42	24"	8	151	553079		552974	156	553473	101336
30-TM-42	30"	10	168	553080		101320	173	553474	101337
36-TM-42	36"	12	270	553081		101321	284	553475	101338
42-TM-42	42"	15	302	553082		101322	343	553476	101339
48-TM-42	48"	18	380	553083		101323		553477	102133

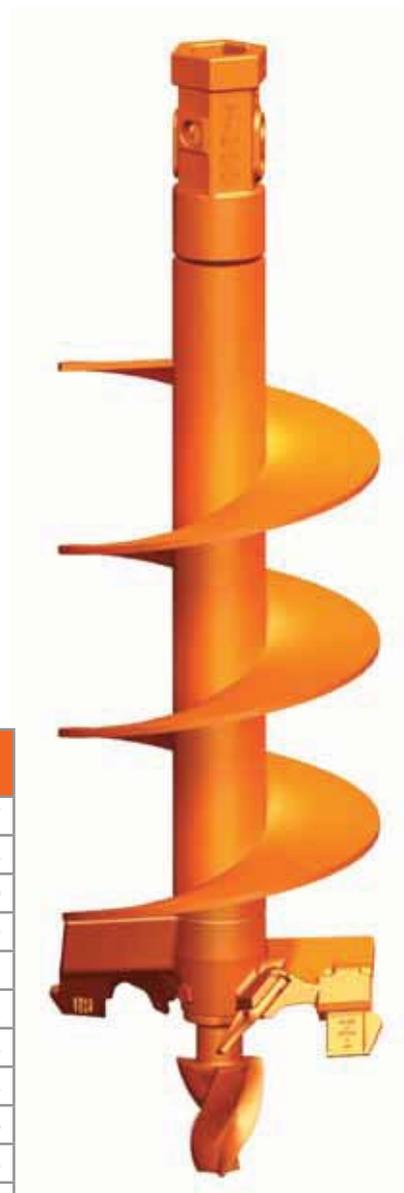

Single Flight
TriMax® Auger



US Patents: 5,476,149